

Used machines offer

Hako Citymaster 2200 - 3 brush sweeper, 109 hp,

Offer number: UM3302842

 **aebi schmidt**
group





Mat.-Nr.: 1359803-8
Year of manufacture: 2017
Serialnumber: WMU2X56E6HWCM0020
Running hours: 4,920 h
Mileage: km
Condition: Class 4
Location: Austria
6401 Inzing / Tirol

Price:

Citymaster 2200 is extremely flexible in use. The quick-change system enables easy demounting of the sweeping technology so that the machine can be used for wet cleaning (sluicing, scrubbing) or winter service tasks (snow clearing, gritting). The low-emissions engine with particle filter combined with our ultra-modern, low-noise and low-dust-emissions sweeping technology allows for employment not only in the city but also in quiet residential areas – even early in the morning or late at night

Gallery

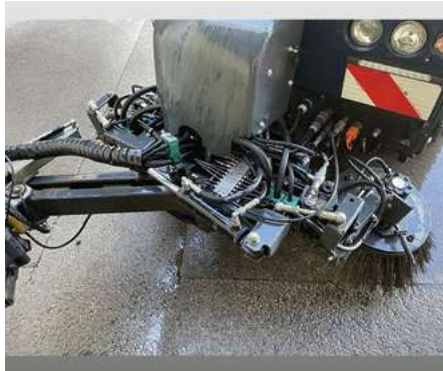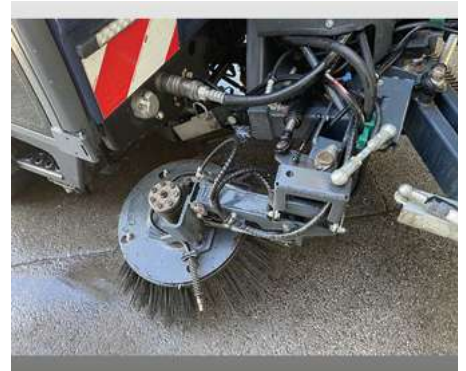



Equipment

Engine and drive

Engine	VM R754 EU6 D3 four-cylinder turbo diesel according to directive 595/2009/EC EURO VI, intercooler, diesel-Oxycat, particle filter, SCR cat, tank capacity 65 l
Displacement/output	2,970 cm ³ / 80 kW (109 HP) at 2,600 rpm
Max. torque	420 Nm at 1,100 rpm

Working and driving characteristics

Driving	Fully hydraulic drive, rear-wheel drive, driver-selected all-wheel steering, optional differential lock, 3 different operating modes- Transport mode with automatic speed & load control, Work mode with constant speed, changing from drive mode to work mode at constant speed, Transport mode up to 62 km/h, standard steering, Changing from drive to work mode up to 25 km/h, all-wheel steering, Work mode up to 15 km/h, all-wheel steering, Reverse mode up to 10 (25) km/h
Working	Load-sensing high pressure hydraulics with variable power distribution, 3 different operating modes- ECO/Standard/MAX switchable at the push of a button, Fan with engine-independent speed control, Additional functions with optional multi-purpose package
Attachment points	Quick-change triangle cat 0 at the front, quick-change ball-mounting system at the rear

Frame, chassis, brakes

Commercial-vehicle	lead frame with 2 steering axles, coil springs with shock absorbers, stabiliser at the rear axle, 4 attachment points for standard lifting platform, dual-circuit braking system with 4 disc brakes and brake booster, Anti-Lock-Brakes (ALB), variable hydrostatic braking power, independent mechanical parking brake acting on the rear axle
--------------------	---

Wheels and tyres

Standard	tyres 225/75 R16C, Wide tyres 285/65 R16C
Cabin	2-seater comfort cabin, occupant-protection tested according to ECE R29, adjustable steering column, comfort seats, 3-point seat belt, comfortable one-hand operation of all sweeping functions, one-button operation to start the sweeping functions, automatic memory-storing of all operating parameters
Sweeping system	Pre-sweep broom 900 mm, 2 basic brooms 750 mm, working width up to 2,000 mm, suction nozzle 800 mm on rollers

Dirt hopper

	V2A stainless steel dirt hopper 2.2 m ³ , gross capacity 1,895 l, usable hopper capacity 1,710 l
--	---

Dimensions and load values

Length/width/height	4,975 mm / 1,320 mm / 2,054 mm
Wheelbase/track width	2,190 mm / 1,054 mm
GVW	6.000 kg
Permissible axle loads	3,200 kg / 3,200 kg
Empty	weight 3,650 kg
Payload	Up to 2,350 kg

Contact

Peter Kaserer

Phone: +43 52385359026

E-Mail: peter.kaserer@aebi-schmidt.com



Aebi Schmidt Holding AG
Leutschenbachstrasse 52
CH-8050 Zurich, Switzerland
Phone.: +41 44 308 58 00
www.aebi-schmidt.com

© Aebi Schmidt Group
All rights reserved.
Technical data is subject to change.
Illustrations are not binding.
Errors and amendments excepted.

Document created on 24 FEB 2025

